

# 1 Removal of total organic carbon from peat solution by hybrid 2 method – electrocoagulation combined with adsorption

3  
4 Pekka Myllymäki<sup>a,b</sup>, Riikka Lahti<sup>a,b</sup>, Henrik Romar<sup>a,b</sup>, Ulla Lassi<sup>a,b</sup>

5  
6 <sup>a</sup>University of Oulu, Research Unit of Sustainable Chemistry, P.O.Box 3000, FI-90014 University of Oulu, Finland

7 <sup>b</sup>University of Jyväskylä, Kokkola University Consortium Chydenius, Applied Chemistry, P.O.Box 567, FI-67101 Kokkola,  
8 Finland

9 \*pekka.myllymaki@chydenius.fi

## 10 11 12 13 **Abstract**

14 Humic substances end up in water from the drainage basin causing eutrophication and the spread of algae.  
15 These natural organic substances have an influence on the physical, chemical and biological properties of the  
16 water system. Adsorption and electrocoagulation (EC) are commonly used purification methods in the water  
17 and wastewater treatment. Both methods are used by themselves for removing a wide range of impurities. In  
18 this research, the novelty was to study the effect of combined activated carbon (AC) adsorption and  
19 electrocoagulation method on the removal of organic substances as total organic carbon (TOC) from the peat  
20 solution. With the hybrid method, TOC content was efficiently removed (~95 %) by using first adsorption  
21 treatment followed by electrocoagulation with Al- or Fe -electrode. Instead, when using the adsorption and  
22 electrocoagulation separately, the removal of TOC was 79-89 %. Based on this study, the hybrid method could  
23 be efficiently used for removing organic substances from the water system.

24  
25 **Keywords:** Humic acid removal, Electrocoagulation, Activated carbon, Adsorption, Water treatment

## 26 27 28 **Highlights**

- 29 • Efficient removal of humic substances, measured as TOC from an aqueous solution made from peat
- 30 • Activated carbon derived from lignocellulosic residue biomass was used as an adsorbent
- 31 • Most efficient method to remove organics was to use adsorption followed by electrocoagulation

## 32 33 **1. Introduction**

34 Humic substances are organic, high molecular weight, natural polymers and originate from the decomposition  
35 of organic substances. Organic substances come to the water from drainage basins and from water system  
36 itself. The toxic algae and microorganisms utilize inorganic and organic nutrients of humic substances in the  
37 water. Humic substances have an impact on the toxicity of heavy metals and organic pollutants forming  
38 complexes with many toxic substances. [1–4]

39 Humic substances occur in water as insoluble form, colloidal form and solid form. Humic substances are  
40 complex organic substances that vary from light brown (fulvic acids) to black (humins) in color. They consist  
41 of three groups of heterogeneous organic polymers: humic acids, fulvic acids and humin substances. Humic  
42 acids are alkali-soluble and fulvic acids are both alkali and acid soluble whereas humin substances are either  
43 alkali or acid soluble [5]. Humic acids are the most abundant fraction of humic substances in soil. Humic acids  
44 have various functional groups, such as carboxylic, alcoholic and phenolic groups and in a random way  
45 arranged aromatic rings [6]. These groups provide a number of potential binding sites for metal ions, for  
46 example, chlorinated organic compounds, which are toxic disinfection byproducts [7–9].

47 Electrocoagulation (EC) is an old but growing water and wastewater treatment method. Contaminants that can  
48 be removed by electrocoagulation are for example heavy metals [10,11], pharmaceuticals and antibiotics  
49 [12,13] and organic pollutants e.g. herbicides, phenols, textile dyes [14–17]. The electrocoagulation reactor is  
50 an electrochemical cell, which has two electrodes, an anode as a sacrificial metal, and cathode. Aluminum and

51 iron metals are typically used as anode metals. Electrocoagulation generates metal ions from a sacrificial  
52 anode (Eq.1). The metal ions from the anode spontaneously hydrolyze in water forming various coagulant  
53 species (Eq.2). These coagulant species agglomerate together forming larger particles by coagulation [18,19].  
54 The purpose of coagulation is to destabilize particles by coagulant chemicals and enable them to become  
55 attached to other particles. Aluminum and iron salts hydrolyze in the water forming insoluble precipitates, which  
56 destabilize the charge of particles by adsorbing onto their surface. There are repulsive forces between the  
57 particles because they have similar electric charge, usually negative. The hydrolyzed products have positive  
58 electric charge.



64 Electrolytically formed gases, mainly hydrogen, are generated on the surface of the cathode (Eq.3). During  
65 beneficial side reactions, gas bubbles are generated which promotes flotation. These agglomerated pollutants  
66 form larger agglomerates, which rise upwards to be removed in the subsequent process. The electrochemical  
67 reduction may take place on the cathode (Eq.4). [20,21]

68 Activated carbons (AC) are widely used in different industrial water purification processes as adsorbents  
69 because of its high surface area and well-developed porous structure [22–28]. Adsorption has been considered  
70 as one of the most economically viable techniques for water treatments and AC is the most widely used  
71 adsorbent. Typically ACs have been prepared from carbonaceous materials e.g. coal. As an alternative eco-  
72 friendly and low-cost raw material, AC can be prepared from residual or waste biomass materials [29–33]. For  
73 the preparation of AC, thermal procedures including carbonization and activation are used. AC has been  
74 proven as an effective adsorbent for the removal of a wide range of organic and inorganic pollutants dissolved  
75 in aqueous media. During the adsorption, dissolved species diffuse into the pores of adsorbent. Because  
76 adsorption takes place on the surface, a large surface area and a high number of pores are necessary for  
77 adsorbent. With high porosity, adsorbents can have a pore volume of 0.1 to 0.8 mL g<sup>-1</sup> and a surface area  
78 ranging from ~700 to 1500 m<sup>2</sup> g<sup>-1</sup>. As a result, the adsorption capacity can be as high as 0.2 g of adsorbate  
79 per gram of adsorbent, depending on the adsorbate concentration and type [21,34]. The size of the adsorbate  
80 that can enter a pore is limited by the size of the pore. In the case of humic acids when adsorbate is a large  
81 organic molecule, meso- and macroporous (pore diameter > 2 nm) structure of activated carbon is favored  
82 [35]. Even though AC has a large market as an adsorbent in water treatment processes, the specific adsorption  
83 mechanisms for solutes containing organic and inorganic material are still not clear [36].

84 In this paper, the removal of organic substances has been studied by a hybrid method: electrocoagulation  
85 combined with adsorption. This kind of experiment setup hasn't been studied before in removal of organic  
86 molecules from waste waters. As an electrocoagulation material, iron and aluminum have been used and the  
87 process was optimized for the reaction. As an adsorbent material activated carbon (forest-residue-based  
88 spruce from Finland) has been used. The removal of total organic carbon has been studied with separate  
89 adsorption or electrocoagulation methods and compared to the hybrid method. In the hybrid method, a  
90 combination of adsorption and electrocoagulation has been tested in the order a) electrocoagulation followed  
91 by adsorption and b) adsorption followed by electrocoagulation.

92

## 93 **2. Materials and methods**

94

### 95 **2.1 Raw materials**

96 Peat obtained from Northern Finland has been used in the preparation of an aqueous solution containing humic  
97 material, activated carbon derived from residue fractions of lignocellulosic biomass; sawdust of spruce.  
98

## 99 **2.2 Methods**

### 100 **2.2.1 Preparation of activated carbons**

101 The dried and sieved lignocellulosic biomass was carbonized and steam activated in a one-step process in a  
102 rotating quartz reactor (Nabertherm GmbH RSRB 80). The thermal process was divided into two parts: the  
103 first carbonization step, in which the temperature was raised to 800 °C, followed by the activation step. During  
104 the activation, the temperature was kept at 800 °C for 120 min with a stream of steam, for the proper surface  
105 activation. During the whole process, the reactor was flushed with an inert gas, N<sub>2</sub>. Prepared AC was sieved  
106 to particle size to 0.4-2.0 mm. By using Micromeritics ASAP 2020, the resulting AC was characterized by the  
107 specific surface area and pore size distribution under isothermal conditions. Specific surface areas were  
108 calculated from adsorption isotherms according to the BET method [37] and pore size distributions were  
109 calculated using the BJH algorithm [38].

### 110 **2.2.2 Total carbon determination**

111 The content of carbon present in AC, given as total carbon (TC) percent, was measured using a solid phase  
112 carbon analyzer (Skalar Primacs MCS). Dried samples were weighted in quartz crucibles, combusted at 1100  
113 °C in an atmosphere of pure oxygen and the formed CO<sub>2</sub> was analyzed by an IR analyzer. Carbon content  
114 values were obtained by reading the signal of IR analyzer from a calibration curve derived from known masses  
115 of a standard substance, oxalic acid. The total mass of carbon was calculated as a percent of the mass initially  
116 weighted and was measured after the carbonization and activation step. The content of organic carbon present  
117 in each sample (± 5%), given as total carbon (TC) mg L<sup>-1</sup>, was measured using a liquid phase carbon analyzer  
118 (Skalar Primacs MCS). TC (Total carbon), TOC (Total organic carbon) and IC (Inorganic carbon) could be  
119 determined with the method.  
120

### 121 **2.2.3 Adsorptive properties**

122 The formed AC's adsorption properties were tested with the adsorption capacity of total organic carbon. A  
123 solution containing a known amount of TOC was prepared, 50 mL of this solution was transferred into  
124 Erlenmeyer flask with a defined amount of activated carbon and the solution was continuously agitated for 24  
125 hours in order to achieve equilibrium between adsorption and desorption of the organic material. Portions of  
126 each solution were filtered and, if needed, diluted, and the concentration of TC, TOC and IC was measured  
127 with TOC analyzer. The adsorbed mass was calculated using Eq(5) and the percent removed was calculated  
128 using Eq(6)  
129

$$130 \quad (ads) = (C_0 - C_t) \cdot \frac{V}{m} \quad (5)$$

$$132 \quad \% \text{ removed} = \frac{C_0 - C_t}{C_0} \quad (6)$$


133  
134 Where  $C_0$  is initial concentration (mg L<sup>-1</sup>),  $C_t$  is measured concentration after 24 h,  $V$  is the volume of the  
135 solution used and  $m$  is a mass of the activated carbon used.  
136  
137

### 138 **2.2.4 Metal content**

139 Metal contents of samples were measured by inductively coupled optical emission spectrometry (ICP-OES)  
140 using a Perkin Elmer Optima 5300 DV ICP-OES instrument. 0.10–0.12 g samples were added to 63 % nitric  
141 acid and hydrogen peroxide, then digesting in a microwave oven (MARS, CEM Corporation) at 200 °C for 10  
142 min. After digestion, the solution was diluted to 50 mL and measured by ICP-OES.  
143  
144

## 145 **2.3 Optimization of distance between anode and cathode**

146 Aluminum and iron metals were used as an anode and stainless steel (SS) was used as the cathode. Electrode  
 147 plate dimensions were 50x50x10 mm. Electrodes were connected a laboratory electrical source (Tektronix DC  
 148 Power Supply; 32V, 6A) and adjusted at 2 V and 1 A. The voltage was kept constant during the experiments.  
 149 The distance between electrodes varies from 5 mm to 20 mm. During the coagulation experiments, the  
 150 electrodes were completely immersed in the sample solution. Prior to experiments, both electrodes were  
 151 cleaned with 1 M nitric acid, tap water and distilled water and finally, dried at 105 °C. Anode plates were  
 152 weighted before and after EC experiments, which led to the discovery of the mass of dissolved anode metal.  
 153 The number of metal cations dissolved during the electrocoagulation can be calculated according to Faraday's  
 154 law. The experiments were carried out using 5 mm, 10 mm and 20 mm distance between anode and cathode.  
 155 Figure 1 illustrates a schematic diagram of the electrocoagulation.

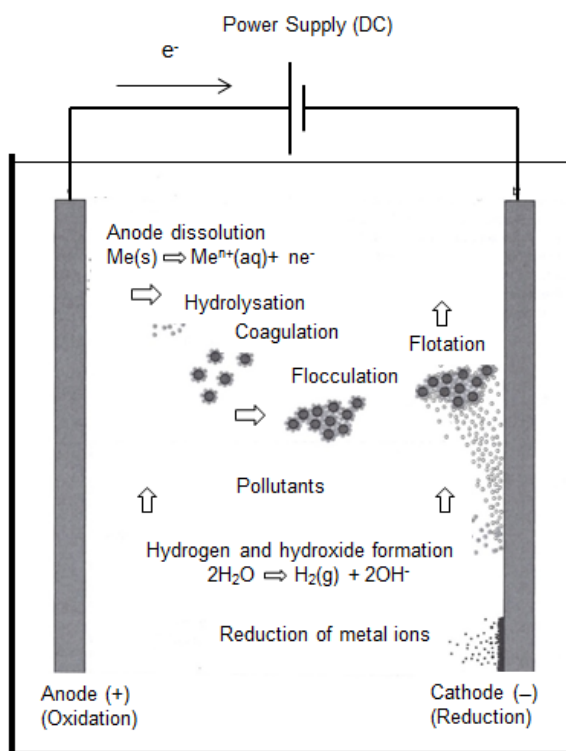


171 **Fig.1.** A schematic diagram of the electrocoagulation (adapted from [20]).

172 Suspension, 50 g L<sup>-1</sup> was prepared from air dry peat. The suspension was stirred for 24 hours, by which time  
 173 humic substances dissolved from peat to water. The suspension was filtered through Whatman 4 (20 – 25 µm)  
 174 filter paper. NaCl was added to the formed solution to ensure sufficient electrical conductivity (3.0 mS cm<sup>-1</sup>).  
 175 The initial pH value was 6.0 and initial temperature was 22 °C. Before experiments, the amount of TC (Total  
 176 carbon), TOC (Total organic carbon) and IC (Inorganic carbon) content were measured. Almost all carbon  
 177 occurred in the form of organic carbon (96.0 %), which are humic substances. Only 4.0 % occurred in the form  
 178 of inorganic carbon. During electrocoagulation, the solution was stirred with magnetic stirrer. The speed of  
 179 rotation of the magnetic stirrer was kept at 200 rpm. The voltage was kept as constant, 2V. Samples were  
 180 taken at fixed-term intervals to measure the TC content of the solution. TC content was measured using a  
 181 liquid phase carbon analyzer Skalar Primacs MCS.

### 183 3. Results and discussion

184 The prepared solution from peat was compared with commercial humic acids (Fig 2.) with Perkin-Elmer  
 185 Spectrum One FT-IR Spectrometer and the main peaks from spectrum at area 1030 cm<sup>-1</sup>, 1370 cm<sup>-1</sup>, 1550  
 186 cm<sup>-1</sup> and 3300 cm<sup>-1</sup> were found from all samples.

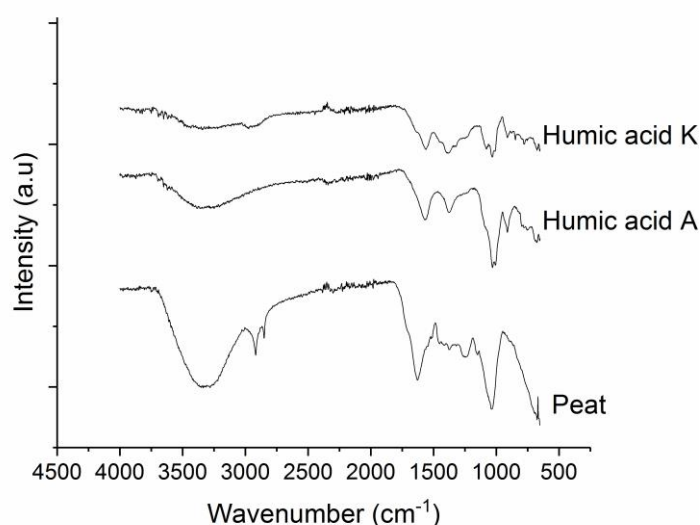

187

188 **Fig.2.** IR-spectrum showing the curves of the peat used, of humic acid powder (Humic acid K) and of the  
 189 industrial peat from Aldrich (Humic acid A).

190 Properties of the prepared activated carbon from spruce were analyzed with N<sub>2</sub>-physisorption. The BET  
 191 surface area of AC was 785 m<sup>2</sup> g<sup>-1</sup> with pore volume 0.46 cm<sup>3</sup> g<sup>-1</sup> and composed mainly from mesopores (82  
 192 %) according to BJH method (Table 1). The high amount of mesoporous structure is important when big  
 193 particles like organic molecules are wanted to adsorb into the internal surface of AC. In this case, over 80% of  
 194 the porous structure was mesopores, concluding that the prepared activated carbon was suitable for  
 195 adsorption of organic molecules. The total carbon content of AC was analyzed with TC and was 92 % (Table  
 196 2). The inorganic material in AC was studied with ash determination method [39] and content of ash was 2.6  
 197 %, which is relatively low, compared to commercial ACs. Moreover, ICP-OES analyze showed the composition  
 198 of metals in the AC (Table 2) and most prevalent metals in AC seemed to be calcium and potassium. According  
 199 to these results, it was assumed that no interfering metals from AC material were present in the study or the  
 200 amounts were really low.

201

202 **Table 1**

203 The surface area, pore volume, pore size and pore volume distribution of the prepared AC.

Sample	BET		BJH				
	Surface area (m <sup>2</sup> g <sup>-1</sup> )	Pore volume (cm <sup>3</sup> g <sup>-1</sup> )	Pore size (nm)	Total volume (cm <sup>3</sup> g <sup>-1</sup> )	Micro d<2nm (%)	Meso 2< d<50 (%)	Macro d>50 nm (%)
AC	785	0.46	2.36	0.28	17.9	82.1	0.0

204


205 **Table 2**

206 Total carbon (TC), inorganic material (ash) content and metal content (ICP-OES) from AC-spruce.

Sample	TC (wt.%)	Ash (wt.%)	Ca (wt.%)	K (wt.%)	Mg (wt.%)	Na (wt.%)	Fe (wt.%)
AC	92	2.6	0.42	0.25	0.06	<0.01	<0.01

207

208 From optimization of electrodes, results showed that the best TC reduction (82.1 %) was achieved when the  
 209 distance between the aluminum anode and stainless steel cathode was 5 mm. The worst TC reduction (62.9  
 210 %) occurred when the distance between the aluminum anode and stainless steel cathode was 20 mm.  
 211 Concerning both aluminum anode and an iron anode, the bigger the distance between electrodes the worse  
 212 the TC reduction was (Fig. 3). It was found that the ranking order of electrocoagulation experiments was  
 213 following: Al5SS > Fe5SS > Fe10SS > Al10SS > Fe20SS > Al20SS. The current density decreased when the  
 214 distance between electrodes increased. All results are shown in Table 3.

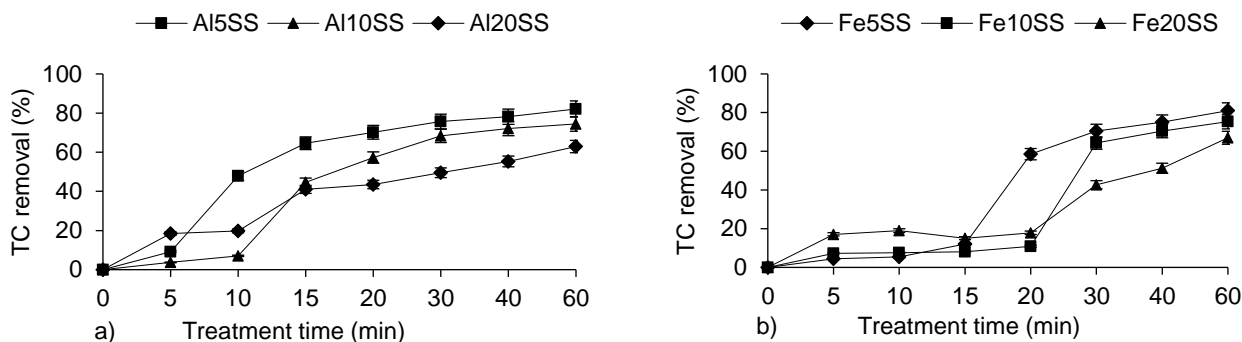

215

216 **Fig.3.** Effect of electrode distances between a) aluminum anode and stainless steel cathode b) iron anode and  
 217 stainless steel cathode on the removal of TC content from peat solution.

218 **Table 3**

219 The parameters of optimization of distance between anode and cathode.

Anode material	Distance anode/cathode (mm)	Voltage (V)	Current (A)	Current density (A m <sup>-2</sup> )	TC removal efficiency (%)	Practical anode loss (mg)	Theoretical anode loss (mg)
Al	5	2	0.21	80	82.1	126	69.5
"	10	2	0.13	50	74.5	74.4	42.6
"	20	2	0.08	30	62.9	41.2	25.9
Fe	5	2	0.16	60	81.0	250	162
"	10	2	0.10	40	75.4	160	98.9
"	20	2	0.07	25	67.0	71.4	70.7

220

221 These optimizing studies showed that the distance between electrodes has to be 5 mm in the hybrid method.  
 222 The hybrid method means that first electrocoagulation is carried out, after that adsorption, and vice versa. At  
 223 the beginning of the experiments, the aluminum and iron contents were at the very low level and also after the  
 224 experiments. It showed that all aluminum and iron from the sacrificed anodes were removed to the precipitation  
 225 (Table 4).


226 **Table 4**

227 The metal content in the peat solution (TC 500 mg L<sup>-1</sup>) at the beginning and after the electrocoagulation  
 228 experiment and metal residue in the precipitate after experiment.

Solution				Precipitate	
Al <sub>initial</sub> (mg g <sup>-1</sup> )	Al <sub>final</sub> (mg g <sup>-1</sup> )	Fe <sub>initial</sub> (mg g <sup>-1</sup> )	Fe <sub>final</sub> (mg g <sup>-1</sup> )	Al <sub>final</sub> (%)	Fe <sub>final</sub> (%)
<0.1	<0.1	1.8	0.2	136	168

229

230 Removal of TC after 60min EC was verified also with IR and results showed that humic substances were  
 231 removed efficiently with an aluminum and iron electrode when the distance between electrodes was 5mm.  
 232 From the spectrum (Fig. 4) changes with different peaks could be detected. Notable changes were at area  
 233 1030 and 1370  $\text{cm}^{-1}$  (C-O stretching), 1550  $\text{cm}^{-1}$  (C=C stretching from aromatic rings), 2850 and 2900  $\text{cm}^{-1}$  (C-  
 234 H stretching) and 3300  $\text{cm}^{-1}$  (OH stretching). Peaks around 1550  $\text{cm}^{-1}$ , 1370  $\text{cm}^{-1}$  might also indicate to N-  
 235 structures. Some organic compounds were still showing presence after EC at the area 700-1100  $\text{cm}^{-1}$ .

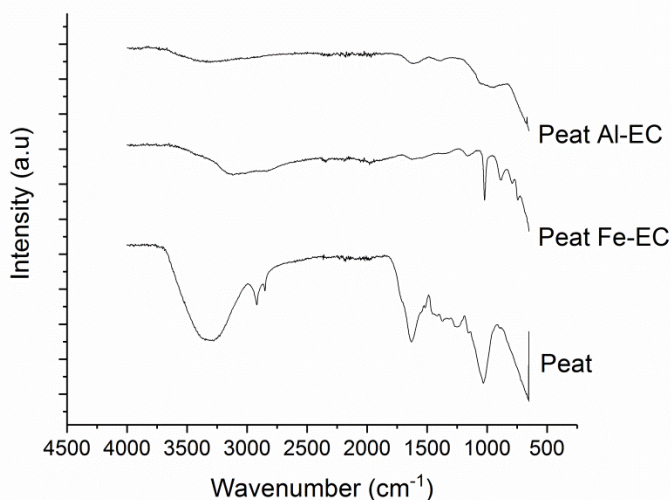


236

237 **Fig.4.** IR spectrums of peat before and after 60 min electrocoagulation with aluminum and iron electrode.

238

239 From optimization of adsorption with activated carbon, results showed (Fig 5.) that the most effective TOC  
 240 removal was achieved when the amount of AC was 10  $\text{g L}^{-1}$  and the adsorption time was 24 hours. Therefore,  
 241 the 24 h adsorption test was chosen to be used in adsorption tests with AC loading 10  $\text{g L}^{-1}$ . In this study, no  
 242 further kinetic studies were performed.

243

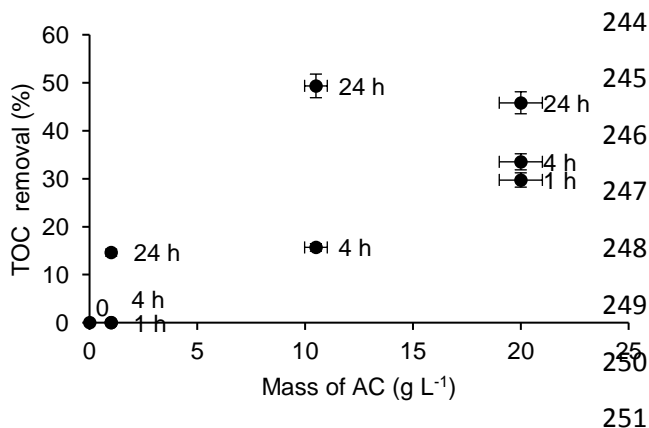

252 **Fig.5.** Total organic carbon removal by adsorption using AC 1, 10 or 20  $\text{g L}^{-1}$  and adsorption time 1, 4 or 24  
 253 hours.


254

### 255 3.1 Comparing electrocoagulation/adsorption and adsorption/electrocoagulation experiments

256 As previously discussed, the optimal distance between electrodes was chosen for 5 mm. With the use of the  
 257 aluminum electrode as anode reduced the concentration of TC from 185.6  $\text{mg L}^{-1}$  to 42.9  $\text{mg L}^{-1}$  and TOC from

258 178.2 mg L<sup>-1</sup> to 36.2 mg L<sup>-1</sup> after 60 min electrocoagulation experiment (Fig. 6a). After electrocoagulation  
 259 experiment, a 24 h adsorption was carried out with the use of AC 10 g L<sup>-1</sup> as adsorbent (Fig. 6b). The adsorption  
 260 enhanced the concentration of TOC to 11.9 mg L<sup>-1</sup>, giving the total reduction of TOC 93.3 %. Instead, IC value  
 261 was increasing after 24-hour adsorption, most likely from the increase of carbon dioxide in solution.


262

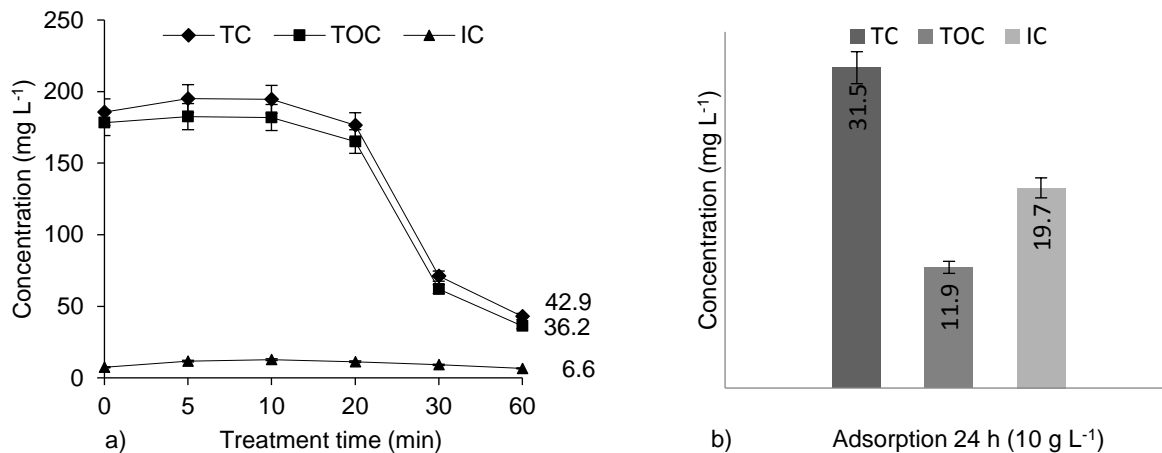

263 **Fig.6.** Total carbon (TC), total organic carbon (TOC), inorganic carbon (IC) concentration after (a) 60 min  
 264 electrocoagulation experiment with aluminum electrode followed by (b) 24-hour adsorption experiment with  
 265 AC load of 10 g L<sup>-1</sup>.

266

267 With the use of the iron electrode as anode reduced the concentration of TC from 185.6 mg L<sup>-1</sup> to 32.6 mg L<sup>-1</sup>  
 268 and TOC from 178.2 mg L<sup>-1</sup> to 23.7 mg L<sup>-1</sup> after 60 min electrocoagulation experiment (Fig. 7a). After  
 269 electrocoagulation experiment, a 24 h adsorption was carried out with the use of AC 10 g L<sup>-1</sup> as adsorbent  
 270 (Fig. 7b). In this case, the adsorption increased the concentration of TOC to 46.8 mg L<sup>-1</sup> and IC from 8.9 to  
 271 23.2 mg L<sup>-1</sup>. This could be due carbon leaching from the adsorbent.

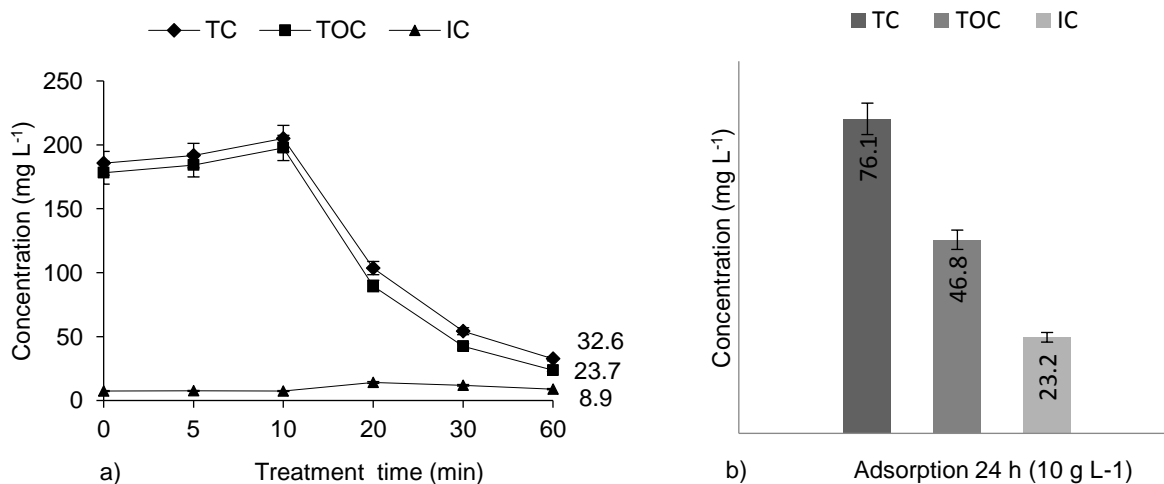

272 **Fig.7.** Total carbon (TC), total organic carbon (TOC), inorganic carbon (IC) concentration after (a) 60 min  
 273 electrocoagulation experiment with iron electrode followed by (b) 24-hour adsorption experiment with AC load  
 274 of 10 g L<sup>-1</sup>.

275



276 Since almost all humic acids are present in solution as organic carbon, the TOC value was used when the total  
 277 removal of carbon was studied. With the use of the iron electrode, the total organic carbon removal was more  
 278 efficient than with aluminum electrode and the results are presented in Table 5. Moreover, a better result in  
 279 the removal of TOC was achieved with a combination of Al-electrocoagulation followed by adsorption giving  
 280 the total TOC removal 93.3 %. Instead, with the combination of Fe-electrocoagulation followed by adsorption  
 281 TOC removal was 73.7 %.

282

283 **Table 5**


284 Total organic carbon (TOC) removal percent from peat solution by electrocoagulation (Al or Fe) followed by  
 285 24-hour equilibrium adsorption with 10g L<sup>-1</sup> of AC.

TOC removal by Al-EC (%)	TOC removal by adsorption after Al-EC (%)	TOC removal by Fe-EC (%)	TOC removal by adsorption after Fe-EC (%)
79.7	93.3	86.7	73.7


286

287 After 24 h equilibrium adsorption, (Fig. 8) with the use of 10 g L<sup>-1</sup> activated carbon, the concentration of TOC  
 288 was reduced from 178.2 to 22.8 mg L<sup>-1</sup> by giving the 89.9 % TOC reduction. Also, in this case, the concentration  
 289 of IC was increased from 7.4 to 29.3 mg L<sup>-1</sup>. When continuing the reduction by electrocoagulation, the  
 290 concentration of TOC decreased to around 9.9 mg L<sup>-1</sup> with both aluminum and iron electrode (Fig. 9).  
 291 Moreover, with the use of the aluminum electrode, the IC content was reduced to minimum 5.6 mg L<sup>-1</sup>. With  
 292 adsorption followed by electrocoagulation, the total reduction of TOC was almost the same for both electrodes,  
 293 ~94.5 % (Table 6).

294

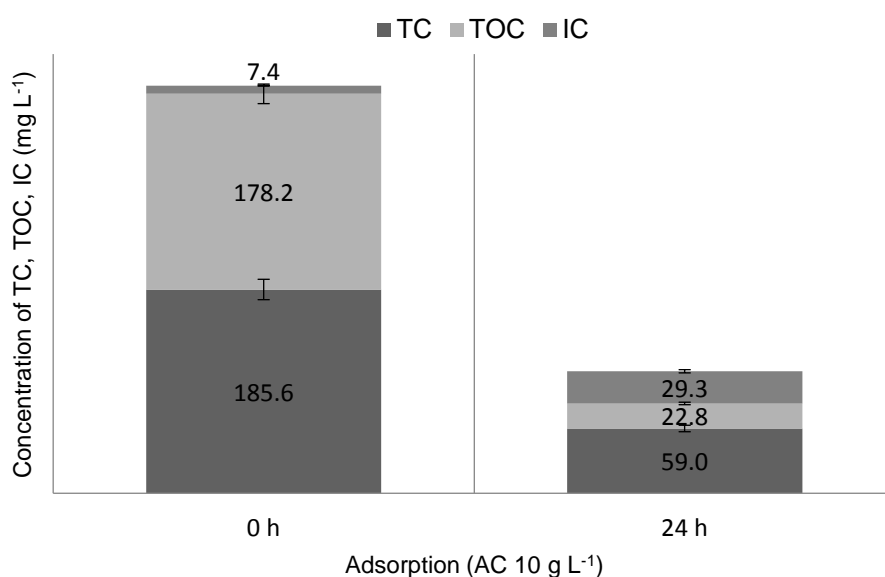

306 **Fig.8.** The concentration of total carbon (TC), total organic carbon (TOC) and inorganic carbon (IC) after 24-  
 307 hour adsorption with activated carbon 10 g L<sup>-1</sup>.

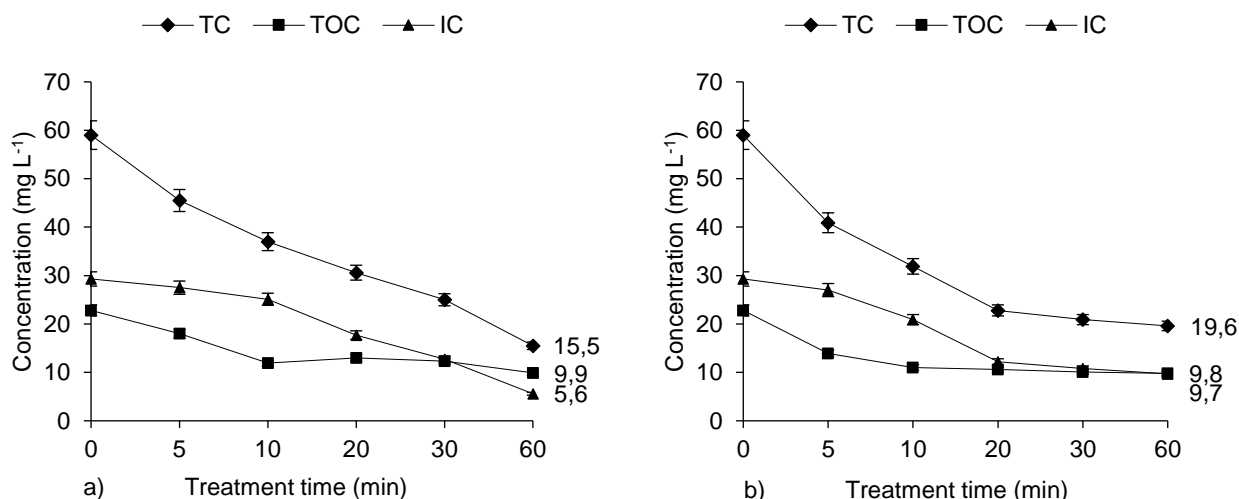

308

309 **Fig.9.** a) Electrocoagulation experiment with the aluminum electrode and b) electrocoagulation experiment  
 310 with iron electrode performed after 24 h adsorption with AC 10 g L<sup>-1</sup>.

311

312 **Table 6**

313 Total organic carbon (TOC) removal from peat solution by 24-hour equilibrium adsorption with 10g L<sup>-1</sup> of AC  
 314 followed by electrocoagulation with Al- or Fe- electrode.

TOC removal by adsorption (%)	TOC removal by Al-EC after adsorption (%)	TOC removal by Fe-EC after adsorption (%)
89.9	94.4	94.5

315

316

317

#### 318 4. Conclusions

319 In this study, the removal of total organic carbon from aqueous peat solution was performed by using  
 320 electrocoagulation with aluminum or iron electrode combined with adsorption by activated carbon prepared  
 321 from lignocellulosic residual biomass. With the optimized hybrid method, the total organic carbon (TOC)  
 322 content was removed efficiently, about 95 % from peat solution by using first adsorption treatment followed by  
 323 electrocoagulation. Moreover, the TOC removal was the same for both Al- (94.4 %) and Fe (94.5 %) electrodes  
 324 after adsorption. Instead, when using the adsorption or electrocoagulation method one at the time the removal  
 325 was between 79-89 %. As a conclusion the removal of total organic carbon from peat solution by the hybrid  
 326 method: activated carbon adsorption combined with Al/Fe- electrocoagulation approved a good method for  
 327 removing organic matter from aqueous solution.

328

329

#### 330 Acknowledgments

331 Authors would like to thank M.Sc. Davide Bergna with the preparation of activated carbon.

332

333

334

335

336

337

338

339

#### References

- [1] R. Sudoh, M.S. Islam, K. Sazawa, T. Okazaki, N. Hata, S. Taguchi, H. Kuramitz, Removal of dissolved humic acid from water by coagulation method using polyaluminum chloride (PAC) with calcium carbonate as neutralizer and coagulant aid, J. Environ. Chem. Eng. 3 (2015) 770–774.

- 340 doi:10.1016/j.jece.2015.04.007.
- 341 [2] J.J. Rook, A. Graveland, L.J. Schultink, Considerations on organic matter in drinking water treatment,  
342 *Water Res.* 16 (1982) 113–122. doi:10.1016/0043-1354(82)90060-4.
- 343 [3] C.W. Carter, I.H. Suffet, Binding of DDT to dissolved humic materials, *Environ. Sci. Technol.* 16  
344 (1982) 735–740. doi:10.1021/es00105a003.
- 345 [4] V.K. Gupta, P.J.M. Carrott, M.M.L. Ribeiro Carrott, Suhas, Low-Cost Adsorbents: Growing Approach  
346 to Wastewater Treatment—a Review, *Crit. Rev. Environ. Sci. Technol.* 39 (2009) 783–842.  
347 doi:10.1080/10643380801977610.
- 348 [5] R.T. Lamar, K.H. Talbot, Critical Comparison of Humic Acid Test Methods, *Commun. Soil Sci. Plant  
349 Anal.* (2009). doi:10.1080/00103620903111251.
- 350 [6] J. Duan, J. Gregory, Coagulation by hydrolysing metal salts, *Adv. Colloid Interface Sci.* (2003).  
351 doi:10.1016/S0001-8686(02)00067-2.
- 352 [7] D. Doulia, C. Leodopoulos, K. Gimouhopoulos, F. Rigas, Adsorption of humic acid on acid-activated  
353 Greek bentonite, *J. Colloid Interface Sci.* 340 (2009) 131–141. doi:10.1016/j.jcis.2009.07.028.
- 354 [8] M.-Y. Chang, R.-S. Juang, Adsorption of tannic acid, humic acid, and dyes from water using the  
355 composite of chitosan and activated clay, *J. Colloid Interface Sci.* 278 (2004) 18–25.  
356 doi:10.1016/j.jcis.2004.05.029.
- 357 [9] S. Yang, J. Hu, C. Chen, D. Shao, X. Wang, Mutual Effects of Pb(II) and Humic Acid Adsorption on  
358 Multiwalled Carbon Nanotubes/Polyacrylamide Composites from Aqueous Solutions, *Environ. Sci.  
359 Technol.* 45 (2011) 3621–3627. doi:10.1021/es104047d.
- 360 [10] S. Vasudevan, M.A. Oturan, Electrochemistry: as cause and cure in water pollution—an overview,  
361 *Environ. Chem. Lett.* 12 (2014) 97–108. doi:10.1007/s10311-013-0434-2.
- 362 [11] E. Bazrafshan, L. Mohammadi, A. Ansari-Moghaddam, A.H. Mahvi, Heavy metals removal from  
363 aqueous environments by electrocoagulation process— a systematic review, *J. Environ. Heal. Sci.  
364 Eng.* 13 (2015) 74. doi:10.1186/s40201-015-0233-8.
- 365 [12] A. Pandiarajan, R. Kamaraj, S. Vasudevan, Enhanced removal of cephalosporin based antibiotics  
366 (CBA) from water by one-pot electrosynthesized Mg(OH)<sub>2</sub>: a combined theoretical and experimental  
367 study to pilot scale, *New J. Chem.* 41 (2017) 4518–4530. doi:10.1039/C6NJ04075F.
- 368 [13] B. Ensano, L. Borea, V. Naddeo, V. Belgiorno, M. de Luna, F. Ballesteros, Removal of  
369 Pharmaceuticals from Wastewater by Intermittent Electrocoagulation, *Water.* 9 (2017) 85.  
370 doi:10.3390/w9020085.
- 371 [14] R. Kamaraj, A. Pandiarajan, S. Vasudevan, S. Vasudevan, Facile one-pot electrosynthesis of zinc  
372 hydroxide for the adsorption of hazardous 2-(2-methyl-4-chlorophenoxy) propionic acid (MCPP) from  
373 water and its modelling studies, *J. Environ. Chem. Eng.* 6 (2018) 2017–2026.  
374 doi:10.1016/j.jece.2018.03.011.
- 375 [15] P. Aravind, V. Subramanyan, S. Ferro, R. Gopalakrishnan, Eco-friendly and facile integrated  
376 biological-cum-photo assisted electrooxidation process for degradation of textile wastewater, *Water  
377 Res.* 93 (2016) 230–241. doi:10.1016/j.watres.2016.02.041.
- 378 [16] S. Vasudevan, An efficient removal of phenol from water by peroxi-electrocoagulation processes, *J.  
379 Water Process Eng.* 2 (2014) 53–57. doi:10.1016/j.jwpe.2014.05.002.
- 380 [17] V. Khandegar, A.K. Saroha, Electrocoagulation for the treatment of textile industry effluent – A  
381 review, *J. Environ. Manage.* 128 (2013) 949–963. doi:10.1016/j.jenvman.2013.06.043.
- 382 [18] D.T. Moussa, M.H. El-Naas, M. Nasser, M.J. Al-Marri, A comprehensive review of electrocoagulation  
383 for water treatment: Potentials and challenges, *J. Environ. Manage.* 186 (2017) 24–41.  
384 doi:10.1016/j.jenvman.2016.10.032.
- 385 [19] P.K. Holt, G.W. Barton, C.A. Mitchell, The future for electrocoagulation as a localised water treatment  
386 technology, *Chemosphere.* 59 (2005) 355–367. doi:10.1016/j.chemosphere.2004.10.023.

- 387 [20] M. Vepsäläinen, Electrocoagulation in the treatment of industrial waters and wastewaters, VTT  
388 Technical Research Centre of Finland, 2012. <http://www.vtt.fi/publications/index.jsp>.
- 389 [21] K. Howe, D. Hand, J. Crittenden, R. Rhodes Trussell, G. Tchobanoglous, Principles of Water  
390 Treatment, John Wiley & Sons, Inc., New Jersey, 2012.
- 391 [22] A. Bhatnagar, W. Hogland, M. Marques, M. Sillanpää, An overview of the modification methods of  
392 activated carbon for its water treatment applications, *Chem. Eng. J.* 219 (2013) 499–511.  
393 doi:10.1016/j.cej.2012.12.038.
- 394 [23] T. Karanfil, Chapter 7 Activated carbon adsorption in drinking water treatment, in: *Act. Carbon*  
395 *Surfaces Environ. Remediat.*, 2006: pp. 345–373. doi:10.1016/S1573-4285(06)80016-5.
- 396 [24] C. Yin, M. Aroua, W. Daud, Review of modifications of activated carbon for enhancing contaminant  
397 uptakes from aqueous solutions, *Sep. Purif. Technol.* 52 (2007) 403–415.  
398 doi:10.1016/j.seppur.2006.06.009.
- 399 [25] J. Rivera-Utrilla, M. Sánchez-Polo, V. Gómez-Serrano, P.M. Álvarez, M.C.M. Alvim-Ferraz, J.M. Dias,  
400 Activated carbon modifications to enhance its water treatment applications. An overview, *J. Hazard.*  
401 *Mater.* 187 (2011) 1–23. doi:10.1016/j.jhazmat.2011.01.033.
- 402 [26] R. Chand Bansal, M. Goyal, Activated Carbon Adsorption, CRC Press, 2005.  
403 doi:10.1201/9781420028812.
- 404 [27] H. Marsh, F. Rodríguez-Reinoso, Preface, in: *Act. Carbon*, Elsevier, 2006: pp. xv–xvi.  
405 doi:10.1016/B978-008044463-5/50013-3.
- 406 [28] R. Lahti, D. Bergna, H. Romar, T. Tuuttila, T. Hu, U. Lassi, Physico-chemical properties and use of  
407 waste biomass-derived activated carbons, 2017. doi:10.3303/CET1757008.
- 408 [29] M. Islam, M. Rouf, Waste biomass as sources for activated carbon production-A review, *Bangladesh*  
409 *J. Sci. Ind. Res.* 47 (2013) 347–364. doi:10.3329/bjsir.v47i4.14064.
- 410 [30] S.J.T. Pollard, G.D. Fowler, C.J. Sollars, R. Perry, Low-cost adsorbents for waste and wastewater  
411 treatment: a review, *Sci. Total Environ.* 116 (1992) 31–52. doi:10.1016/0048-9697(92)90363-W.
- 412 [31] Y. Zhou, L. Zhang, Z. Cheng, Removal of organic pollutants from aqueous solution using agricultural  
413 wastes: A review, *J. Mol. Liq.* 212 (2015) 739–762. doi:10.1016/j.molliq.2015.10.023.
- 414 [32] M.A. Yahya, Z. Al-Qodah, C.W.Z. Ngah, Agricultural bio-waste materials as potential sustainable  
415 precursors used for activated carbon production: A review, *Renew. Sustain. Energy Rev.* 46 (2015)  
416 218–235. doi:10.1016/j.rser.2015.02.051.
- 417 [33] D. Bergna, H. Romar, S. Tuomikoski, H. Runtti, T. Kangas, P. Tynjälä, U. Lassi, Activated Carbon  
418 from Renewable Sources: Thermochemical Conversion and Activation of Biomass and Carbon  
419 Residues from Biomass Gasification, in: L. Singh, V.C. Kalia (Eds.), *Waste Biomass Manag. – A*  
420 *Holist. Approach*, Springer International Publishing, Cham, 2017: pp. 187–213. doi:10.1007/978-3-  
421 319-49595-8\_9.
- 422 [34] O. Ioannidou, A. Zabaniotou, Agricultural residues as precursors for activated carbon production—A  
423 review, *Renew. Sustain. Energy Rev.* 11 (2007) 1966–2005. doi:10.1016/j.rser.2006.03.013.
- 424 [35] S. Han, S. Kim, H. Lim, W. Choi, H. Park, J. Yoon, T. Hyeon, New nanoporous carbon materials with  
425 high adsorption capacity and rapid adsorption kinetics for removing humic acids, *Microporous*  
426 *Mesoporous Mater.* 58 (2003) 131–135. doi:10.1016/S1387-1811(02)00611-X.
- 427 [36] P. Chingombe, B. Saha, R.J. Wakeman, Surface modification and characterisation of a coal-based  
428 activated carbon, *Carbon N. Y.* 43 (2005) 3132–3143. doi:10.1016/j.carbon.2005.06.021.
- 429 [37] S. Brunauer, P.H. Emmett, E. Teller, Adsorption of Gases in Multimolecular Layers, *J. Am. Chem.*  
430 *Soc.* 60 (1938) 309–319. doi:10.1021/ja01269a023.
- 431 [38] L.G. Joyner, E.P. Barrett, R. Skold, The Determination of Pore Volume and Area Distributions in  
432 Porous Substances. II. Comparison between Nitrogen Isotherm and Mercury Porosimeter Methods, *J.*  
433 *Am. Chem. Soc.* 73 (1951) 3155–3158. doi:10.1021/ja01151a046.

434 [39] EN 14775, Solid biofuels - Determination of ash content Biocombustibles, 2009.  
435